



Black Bear Corporation
7688 Carnegie Ave, Fontana CA 92336
Ph: 909-390-0380 Fax: 909-390-0270
www.blackbearusa.com



Black Bear Endtruck Selection Guide

Top Running and Under Running Single and Double Girder

Under Running Endtruck



Top Running Endtruck





Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
 www.blackbearusa.com



Top Running Endtruck- **Double** Girder

September 2012

Capacity	Max. Span (Ft)	HP*2	Total Amp Draw (460v)	Wheel Diam (In.)	Wheel Base (In.)	Overall Length (In.)	Wheel Tread Width (In.)	E.T Weight (lbs/Pair)	Max. Wheel Loading (lbs)
0.5-1 Ton									
TC-05-60-60	29	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-60-75	29	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-60-85	29	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-60-100	29	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-80-60	40	0.5	1.29	4.7	69.3	79.4	2.2	615	3900
TC-05-80-75	40	0.5	1.29	4.7	69.3	79.4	2.2	615	3900
TC-05-80-85	40	1	2	4.7	69.3	79.4	2.2	615	3900
TC-05-80-100	40	1	2	4.7	69.3	79.4	2.2	615	3900
TC-05-100-60	52	0.5	1.29	4.7	89.0	99.1	2.2	675	3900
TC-05-100-75	52	1	2	4.7	89.0	99.1	2.2	675	3900
TC-05-100-85	52	1	2	4.7	89.0	99.1	2.2	675	3900
TC-05-100-100	52	1	2	4.7	89.0	99.1	2.2	675	3900
TC-06-120-60	63	1	2	5.9	108.7	118.7	2.6	930	6200
TC-06-120-75	63	1	2	5.9	108.7	118.7	2.6	930	6200
TC-06-120-85	63	1	2	5.9	108.7	118.7	2.6	930	6200
TC-06-120-100	63	1.5	2.58	5.9	108.7	118.7	2.6	930	6200
TC-08-140-60	74	1	2	5.9	126.4	138.6	2.6	1400	6200
TC-08-140-75	74	1	2	5.9	126.4	138.6	2.6	1400	6200
TC-08-140-85	74	1.5	2.59	5.9	126.4	138.6	2.6	1400	6200
TC-08-140-100	74	1.5	2.58	5.9	126.4	138.6	2.6	1400	6200
Capacity	Max. Span (Ft)	HP*2	Total Amp Draw (460v)	Wheel Diam (In.)	Wheel Base (In.)	Overall Length (In.)	Wheel Tread Width (In.)	E.T Weight (lbs/Pair)	Max. Wheel Loading (lbs)
2 Ton									
TC-05-60-60	29	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-60-75	29	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-60-85	29	1	2	4.7	49.6	59.7	2.2	530	3900
TC-05-60-100	29	1	2	4.7	49.6	59.7	2.2	530	3900
TC-05-80-60	40	0.5	1.29	4.7	69.3	79.4	2.2	615	3900
TC-05-80-75	40	1	2	4.7	69.3	79.4	2.2	615	3900
TC-05-80-85	40	1	2	4.7	69.3	79.4	2.2	615	3900
TC-05-80-100	40	1	2	4.7	69.3	79.4	2.2	615	3900
TC-06-100-60	52	1	2	5.9	89.0	99.1	2.6	845	6200
TC-06-100-75	52	1	2	5.9	89.0	99.1	2.6	845	6200
TC-06-100-85	52	1	2	5.9	89.0	99.1	2.6	845	6200
TC-06-100-100	52	1.5	2.58	5.9	89.0	99.1	2.6	845	6200
TC-08-120-60	62	1	2	7.7	106.7	118.9	2.6	1300	8100
TC-08-120-75	62	1	2	7.7	106.7	118.9	2.6	1300	8100
TC-08-120-85	62	1	2	7.7	106.7	118.9	2.6	1300	8100
TC-08-120-100	62	1.5	2.58	7.7	106.7	118.9	2.6	1300	8100
TC-09-140-60	73	1.5	2.58	8.5	125.6	138.6	2.6	1700	8900



Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
www.blackbearusa.com



Top Running Endtruck- **Double** Girder

Capacity	Max. Span (Ft)	HP*2	Total Amp Draw (460v)	Wheel Diam (In.)	Wheel Base (In.)	Overall Length (In.)	Wheel Tread Width (In.)	E.T Weight (lbs/Pair)	Max. Wheel Loading (lbs)
2 Ton									
TC-09-140-75	73	1.5	2.58	8.5	125.6	138.6	2.6	1700	8900
TC-09-140-85	73	1.5	2.58	8.5	125.6	138.6	2.6	1700	8900
TC-09-140-100	73	2	3.44	8.5	125.6	138.6	2.6	1700	8900
Capacity	Max. Span (Ft)	HP*2	Total Amp Draw (460v)	Wheel Diam (In.)	Wheel Base (In.)	Overall Length (In.)	Wheel Tread Width (In.)	E.T Weight (lbs/Pair)	Max. Wheel Loading (lbs)
3 Ton									
TC-06-100-60	52	1	2	5.9	89.0	99.1	2.6	845	6200
TC-06-100-75	52	1	2	5.9	89.0	99.1	2.6	845	6200
TC-06-100-85	52	1	2	5.9	89.0	99.1	2.6	845	6200
TC-06-100-100	52	1.5	2.58	5.9	89.0	99.1	2.6	845	6200
TC-08-100-60	51	1	2	7.7	87.0	99.2	2.6	1205	8100
TC-08-100-75	51	1	2	7.7	87.0	99.2	2.6	1205	8100
TC-08-100-85	51	1.5	2.58	7.7	87.0	99.2	2.6	1205	8100
TC-08-100-100	51	1.5	2.58	7.7	87.0	99.2	2.6	1205	8100
TC-09-120-60	62	1	2	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-75	62	1.5	2.58	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-85	62	1.5	2.58	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-100	62	1.5	2.58	8.5	105.9	118.9	2.6	1585	8900
TC-10-140-60	72	1.5	2.58	8.5	122.8	138.6	2.6	1700	8900
TC-10-140-75	72	1.5	2.58	8.5	122.8	138.6	2.6	1700	8900
TC-10-140-85	72	2	3.44	8.5	122.8	138.6	2.6	1700	8900
TC-10-140-100	72	2	3.44	8.5	122.8	138.6	2.6	1700	8900
Capacity	Max. Span (Ft)	HP*2	Total Amp Draw (460v)	Wheel Diam (In.)	Wheel Base (In.)	Overall Length (In.)	Wheel Tread Width (In.)	E.T Weight (lbs/Pair)	Max. Wheel Loading (lbs)
5 Ton									
TC-08-100-60	51	1	2	7.7	87.0	99.2	2.6	1205	8100
TC-08-100-75	51	1	2	7.7	87.0	99.2	2.6	1205	8100
TC-08-100-85	51	1	2	7.7	87.0	99.2	2.6	1205	8100
TC-08-100-100	51	1.5	2.58	8.5	87.0	99.2	2.6	1205	8900
TC-09-100-60	50	1	2	8.5	86.2	99.2	2.6	1385	8900
TC-09-100-75	50	1	2	8.5	86.2	99.2	2.6	1385	8900
TC-09-100-85	50	1	2	8.5	86.2	99.2	2.6	1385	8900
TC-09-100-100	50	2	3.44	8.5	86.2	99.2	2.6	1385	8900
TC-09-120-60	62	1.5	2.58	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-75	62	1	2	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-85	62	1	2	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-100	62	2	3.44	8.5	105.9	118.9	2.6	1585	8900
TC-10-140-60	72	1.5	2.58	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-75	72	1.5	2.58	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-85	72	2	3.44	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-100	72	2	3.44	9.8	122.8	138.7	2.8	2130	19400



Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
 www.blackbearusa.com



Top Running Endtruck- **Double** Girder

Capacity	Max. Span (Ft)	HP*2	Total Amp Draw (460v)	Wheel Diam (In.)	Wheel Base (In.)	Overall Length (In.)	Wheel Tread Width (In.)	E.T Weight (lbs/Pair)	Max. Wheel Loading (lbs)
7.5 Ton									
TC-10-120-60	60	1.5	2.58	9.8	103.2	119.1	2.8	1965	19400
TC-10-120-75	60	1.5	2.58	9.8	103.2	119.1	2.8	1965	19400
TC-10-120-85	60	2	3.44	9.8	103.2	119.1	2.8	1965	19400
TC-10-120-100	60	2	3.44	9.8	103.2	119.1	2.8	1965	19400
TC-10-140-60	72	1.5	2.58	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-75	72	2	3.44	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-85	72	2	3.44	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-100	72	3	4.59	9.8	122.8	138.7	2.8	2130	19400
TC-12-160-60	82	3	3.44	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-75	82	2	3.44	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-85	82	3	4.59	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-100	82	3	4.59	11.8	140.2	158.4	3.4	2670	22000
Capacity	Max. Span (Ft)	HP*2	Total Amp Draw (460v)	Wheel Diam (In.)	Wheel Base (In.)	Overall Length (In.)	Wheel Tread Width (In.)	E.T Weight (lbs/Pair)	Max. Wheel Loading (lbs)
10 Ton									
TC-10-140-60	72	1	2	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-75	72	1	2	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-85	72	2	3.44	9.8	122.8	138.7	2.8	2130	19400
TC-10-140-100	72	2	3.44	9.8	122.8	138.7	2.8	2130	19400
TC-12-140-60	70	3	3.44	11.8	120.5	138.7	3.4	2430	22000
TC-12-140-75	70	3	4.59	11.8	120.5	138.7	3.4	2430	22000
TC-12-140-85	70	4	4.59	11.8	120.5	138.7	3.4	2430	22000
TC-12-140-100	70	4	5.72	11.8	120.5	138.7	3.4	2430	22000
TC-12-160-60	82	2	3.44	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-75	82	3	4.59	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-85	82	3	4.59	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-100	82	4	5.72	11.8	140.2	158.4	3.4	2670	22000
Capacity	Max. Span (Ft)	HP*2	Total Amp Draw (460v)	Wheel Diam (In.)	Wheel Base (In.)	Overall Length (In.)	Wheel Tread Width (In.)	E.T Weight (lbs/Pair)	Max. Wheel Loading (lbs)
15 Ton									
TC-12-140-60	70	3	3.44	11.8	120.5	138.7	3.4	2430	22000
TC-12-140-75	70	3	3.44	11.8	120.5	138.7	3.4	2430	22000
TC-12-140-85	70	4	4.59	11.8	120.5	138.7	3.4	2430	22000
TC-12-140-100	70	4	4.59	11.8	120.5	138.7	3.4	2430	22000
TC-12-160-60	82	2	3.44	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-75	82	3	4.59	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-85	82	3	4.59	11.8	140.2	158.4	3.4	2670	22000
TC-12-160-100	82	3	4.59	11.8	140.2	158.4	3.4	2670	22000
TC-16-160-60	80	3	3.44	15.8	137.8	158.4	3.4	3880	28500
TC-16-160-75	80	3	4.59	15.8	137.8	158.4	3.4	3880	28500
TC-16-160-85	80	3	4.59	15.8	137.8	158.4	3.4	3880	28500
TC-16-160-100	80	4	5.72	15.8	137.8	158.4	3.4	3880	28500



Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
 www.blackbearusa.com



Top Running Endtruck- **Single Girder**

September 2012

Capacity 0.5-1 Ton	Max SPAN (FT)	HP*2	Total Amp Draw (460V)	Wheel Diam (In)	WHEEL BASE (In.)	Overall Length (In.)	Wheel Tread Width (in)	Est. WT (lbs)	Max Wheel Loading (Pair)
TC-05-60-60	33	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-60-75	33	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-60-85	33	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-60-100	33	0.5	1.29	4.7	49.6	59.7	2.2	530	3900
TC-05-80-60	46	0.5	1.29	4.7	69.3	79.4	2.2	615	3900
TC-05-80-75	46	0.5	1.29	4.7	69.3	79.4	2.2	615	3900
TC-05-80-85	46	0.5	1.29	4.7	69.3	79.4	2.2	615	3900
TC-05-80-100	46	0.5	1.29	4.7	69.3	79.4	2.2	615	3900
TC-06-100-60	59	0.5	1.29	5.9	89	99.1	2.6	845	6200
TC-06-100-75	59	0.5	1.29	5.9	89	99.1	2.6	845	6200
TC-06-100-85	59	0.5	1.29	5.9	89	99.1	2.6	845	6200
TC-06-100-100	59	1	2	5.9	89	99.1	2.6	845	6200
TC-08-120-60	71	0.5	1.29	7.7	106.7	118.9	2.6	1300	8100
TC-08-120-75	71	0.5	1.29	7.7	106.7	118.9	2.6	1300	8100
TC-08-120-85	71	0.5	1.29	7.7	106.7	118.9	2.6	1300	8100
TC-08-120-100	71	1	2	7.7	106.7	118.9	2.6	1300	8100
Capacity 2 Ton	Max SPAN (FT)	HP*2	Total Amp Draw (460V)	Wheel Diam (In)	WHEEL BASE (In.)	Overall Length (In.)	Wheel Tread Width (in)	Est. WT (lbs)	Max Wheel Loading (Pair)
TC-06-60-60	33	0.5	1.29	5.9	49.6	59.7	2.6	671	6200
TC-06-60-75	33	0.5	1.29	5.9	49.6	59.7	2.6	671	6200
TC-06-60-85	33	0.5	1.29	5.9	49.6	59.7	2.6	671	6200
TC-06-60-100	33	1	2	5.9	49.6	59.7	2.6	671	6200
TC-06-80-60	46	0.5	1.29	5.9	69.3	79.4	2.6	765	6200
TC-06-80-75	46	0.5	1.29	5.9	69.3	79.4	2.6	765	6200
TC-06-80-85	46	1	2	5.9	69.3	79.4	2.6	765	6200
TC-06-80-100	46	1	2	5.9	69.3	79.4	2.6	765	6200
TC-08-100-60	58	0.5	1.29	7.7	87	99.2	2.6	1205	8100
TC-08-100-75	58	0.5	1.29	7.7	87	99.2	2.6	1205	8100
TC-08-100-85	58	1.5	2	7.7	87	99.2	2.6	1205	8100
TC-08-100-100	58	1	2	7.7	87	99.2	2.6	1205	8100
TC-09-120-60	71	0.5	1.29	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-75	71	1	2	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-85	71	1	2	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-100	71	1	2	8.5	105.9	118.9	2.6	1585	8900



Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
 www.blackbearusa.com



Top Running Endtruck- **Single** Girder

Capacity 3 Ton	Max SPAN (FT)	HP*2	Total Amp Draw (460V)	Wheel Diam (In)	WHEEL BASE (In.)	Overall Length (In.)	Wheel Tread Width (in)	Est. WT (lbs)	Max Wheel Loading (Pair)
TC-06-60-60	33	0.5	1.29	5.9	49.6	59.7	2.6	671	6200
TC-06-60-75	33	0.5	1.29	5.9	49.6	59.7	2.6	671	6200
TC-06-60-85	33	1	2	5.9	49.6	59.7	2.6	671	6200
TC-06-60-100	33	1	2	5.9	49.6	59.7	2.6	671	6200
TC-08-80-60	45	0.5	1.29	7.7	67.3	79.5	2.6	960	8100
TC-08-80-75	45	0.5	1.29	7.7	67.3	79.5	2.6	960	8100
TC-08-80-85	45	1	2	7.7	67.3	79.5	2.6	960	8100
TC-08-80-100	45	1	2	7.7	67.3	79.5	2.6	960	8100
TC-08-100-60	58	0.5	1.29	7.7	87	99.2	2.6	1205	8100
TC-08-100-75	58	1	2	7.7	87	99.2	2.6	1205	8100
TC-08-100-85	58	1.5	2	7.7	87	99.2	2.6	1205	8100
TC-08-100-100	58	1	2	7.7	87	99.2	2.6	1205	8100
TC-09-120-60	71	1	2	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-75	71	1	2	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-85	71	1	2	8.5	105.9	118.9	2.6	1585	8900
TC-09-120-100	71	1.5	2.58	8.5	105.9	118.9	2.6	1585	8900
Capacity 5 Ton	Max SPAN (FT)	HP*2	Total Amp Draw (460V)	Wheel Diam (In)	WHEEL BASE (In.)	Overall Length (In.)	Wheel Tread Width (in)	Est. WT (lbs)	Max Wheel Loading (Pair)
TC-09-80-60	44	1	2	8.5	66.5	79.5	2.6	1270	8900
TC-09-80-75	44	1	2	8.5	66.5	79.5	2.6	1270	8900
TC-09-80-85	44	1	2	8.5	66.5	79.5	2.6	1270	8900
TC-09-80-100	44	1	2	8.5	66.5	79.5	2.6	1270	8900
TC-10-100-60	56	1	2	9.8	83.5	99.4	2.8	1815	19400
TC-10-100-75	56	1	2	9.8	83.5	99.4	2.8	1815	19400
TC-10-100-85	56	1	2	9.8	83.5	99.4	2.8	1815	19400
TC-10-100-100	56	1.5	2.58	9.8	83.5	99.4	2.8	1815	19400
TC-10-120-60	69	1	2	9.8	103.2	119.1	2.8	1965	19400
TC-10-120-75	69	1	2	9.8	103.2	119.1	2.8	1965	19400
TC-10-120-85	69	1.5	2.58	9.8	103.2	119.1	2.8	1965	19400
TC-10-120-100	69	1.5	2.58	9.8	103.2	119.1	2.8	1965	19400



Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
 www.blackbearusa.com




Top Running Endtruck- **Single** Girder

Capacity 7.5 Ton	Max SPAN (FT)	HP*2	Total Amp Draw (460V)	Wheel Diam (In)	WHEEL BASE (In.)	Overall Length (In.)	Wheel Tread Width (in)	Est. WT (lbs)	Max Wheel Loading (Pair)
TC-10-80-60	43	1	2	9.8	63.8	79.7	2.8	1660	19400
TC-10-80-75	43	1	2	9.8	63.8	79.7	2.8	1660	19400
TC-10-80-85	43	1.5	2.58	9.8	63.8	79.7	2.8	1660	19400
TC-10-80-100	43	1.5	2.58	9.8	63.8	79.7	2.8	1660	19400
TC-12-100-60	54	1	2	11.8	81.1	99.4	3.4	2080	22000
TC-12-100-75	54	1.5	2.58	11.8	81.1	99.4	3.4	2080	22000
TC-12-100-85	54	1.5	2.58	11.8	81.1	99.4	3.4	2080	22000
TC-12-100-100	54	2	3.44	11.8	81.1	99.4	3.4	2080	22000
Capacity 10 Ton	Max SPAN (FT)	HP*2	Total Amp Draw (460V)	Wheel Diam (In)	WHEEL BASE (In.)	Overall Length (In.)	Wheel Tread Width (in)	Est. WT (lbs)	Max Wheel Loading (Pair)
TC-10-80-60	43	1	2	9.8	63.8	79.7	2.8	1660	19400
TC-10-80-75	43	1.5	2.58	9.8	63.8	79.7	2.8	1660	19400
TC-10-80-85	43	1.5	2.58	9.8	63.8	79.7	2.8	1660	19400
TC-10-80-100	43	2	3.44	9.8	63.8	79.7	2.8	1660	19400
TC-12-100-60	54	1.5	2.58	11.8	81.1	99.4	3.4	2080	22000
TC-12-100-75	54	1.5	2.58	11.8	81.1	99.4	3.4	2080	22000
TC-12-100-85	54	1.5	2.58	11.8	81.1	99.4	3.4	2080	22000
TC-12-100-100	54	2	3.44	11.8	81.1	99.4	3.4	2080	22000



■ UNDER RUNNING CHANNEL STEEL END TRUCKS

□ PRODUCT CODES

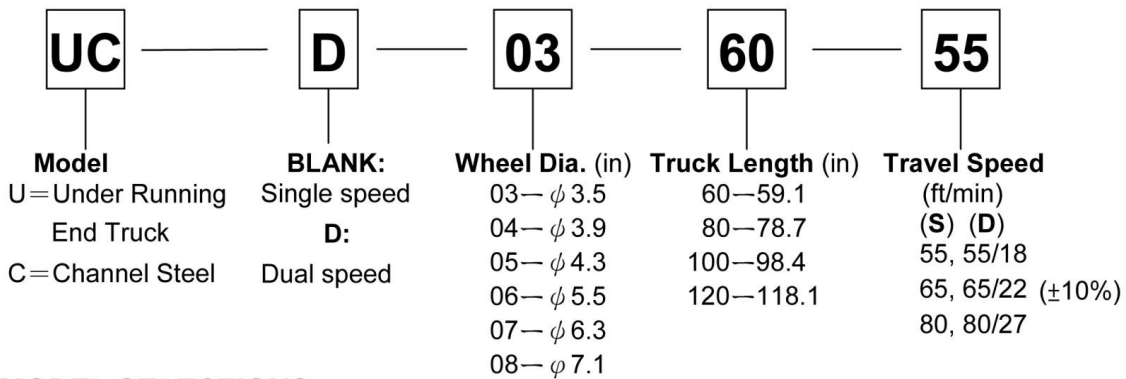

□ MODEL SELECTIONS SINGLE GIRDER

Model	Capacity (ton)	SPAN (ft)							
		20	26	33	40	46	53	60	
UC	0.5~1	UC-03-60		UC-03-80		UC-03-100			
	2	UC-04-60		UC-04-80		UC-04-100			
	3	UC-05-80			UC-05-100				
	5	UC-05-60		UC-06-80		UC-06-100		UC-07-100	
	7.5					UC-07-100		UC-07-120	
	10	UC-06-60		UC-07-80		UC-08-100		UC-08-120	



Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
 www.blackbearusa.com



Underhung Endtruck- **Single Girder**

September 2012

Model	Max. Span (Ft)	HP*2	Full Load Amp.		Gear Ratio	Est Weight (lbs/pair)	WHEEL BASE (In.)	Max. Wheel Loading (Pair)
			230 (A)	460(A)				
0.5-1 Ton								
UC-03-60-55	29	0.3	1.4	0.74	10	390	43.5	8800
UC-03-60-65	29	0.5	2.6	1.29	10	390	43.5	8800
UC-03-60-80	29	0.3	2.6	1.29	8.5	390	43.5	8800
UC-03-80-55	40	0.3	1.4	0.74	10	450	60	8800
UC-03-80-65	40	0.5	2.6	1.29	8.5	450	60	8800
UC-03-80-80	40	0.5	2.6	1.29	8.5	450	60	8800
UC-03-100-55	63	0.5	2.6	1.29	15	510	94.5	8800
UC-03-100-65	63	0.5	2.6	1.29	8.5	510	94.5	8800
UC-03-100-80	63	1	4	2	8.5	510	94.5	8800
Model	Max. Span (Ft)	HP*2	Full Load Amp.		Gear Ratio	Est Weight (lbs/pair)	WHEEL BASE (In.)	Max. Wheel Loading
			230 (A)	460(A)				
2 Ton								
UC-04-60-55	26	0.5	2.6	1.29	15	510	39	9680
UC-04-60-65	26	0.5	2.6	1.29	8.5	510	39	9680
UC-04-60-80	26	0.5	2.6	1.29	8.5	510	39	9680
UC-04-80-55	36	0.5	2.6	1.29	15	590	54	9680
UC-04-80-65	36	0.5	2.6	1.29	8.5	590	54	9680
UC-04-80-80	36	1	4	2	8.5	590	54	9680
UC-04-100-55	63	1	4	2	15	780	94.5	9680
UC-04-100-65	63	1	4	2	8.5	780	94.5	9680
UC-04-100-80	63	1	4	2	8.5	780	94.5	9680
Model	Max. Span (Ft)	HP*2	Full Load Amp.		Gear Ratio	Est Weight (lbs/pair)	WHEEL BASE (In.)	Max. Wheel Loading
			230 (A)	460(A)				
3 Ton								
UC-04-60-55	23	0.5	2.6	1.29	15	510	34.5	9680
UC-04-60-65	23	1	4	2	8.5	510	34.5	9680
UC-04-60-80	23	1	4	2	8.5	510	34.5	9680
UC-05-80-55	36	0.5	2.6	1.29	15	800	54	13200
UC-05-80-65	36	1	4	2	8.5	800	54	13200
UC-05-80-80	36	1	4	2	8.5	800	54	13200
UC-05-100-55	63	1	4	2	15	880	94.5	13200
UC-05-100-65	63	1	4	2	8.5	880	94.5	13200
UC-05-100-80	63	1.5	5.2	2.58	8.5	880	94.5	13200
Model	Max. Span (Ft)	HP*2	Full Load Amp.		Gear Ratio	Est Weight (lbs/pair)	WHEEL BASE (In.)	Max. Wheel Loading
			230 (A)	460(A)				
5Ton								
UC-05-60-55	23	1	4	2	15	690	34.5	13200
UC-05-60-65	23	1	4	2	8.5	690	34.5	13200
UC-05-60-80	23	1.5	5.2	2.58	8.5	690	34.5	13200
UC-06-80-55	40	1	4	2	15	960	60	14960



Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
 www.blackbearusa.com



Underhung Endtruck- **Single Girder**

Model	Max. Span (Ft)	HP*2	Full Load Amp.		Gear Ratio	Est Weight (lbs/pair)	WHEEL BASE (In.)	Max. Wheel Loading (Pair)
			230 (A)	460(A)				
5 Ton								
UC-06-80-80	40	1.5	5.2	2.58	8.5	960	60	14960
UC-06-100-55	49	1	4	2	15	1070	73.5	14960
UC-06-100-65	49	1	4	2	15	1070	73.5	14960
UC-06-100-80	49	1.5	5.2	2.58	8.5	1070	73.5	14960
UC-07-100-55	63	1	4	2	15	1350	94.5	16600
UC-07-100-65	63	1	4	2	15	1350	94.5	16600
UC-07-100-80	63	1.5	5.2	2.58	8.5	1350	94.5	16600
Model	Max. Span (Ft)	HP*2	Full Load Amp.		Gear Ratio	Est Weight (lbs/pair)	WHEEL BASE (In.)	Max. Wheel Loading
			230 (A)	460(A)				
7.5 Ton								
UC-05-60-55	23	1.5	5.2	2.6	15	690	34.5	13200
UC-05-60-65	23	1.5	5.2	2.6	15	690	34.5	13200
UC-05-60-80	23	2	6.88	3.44	12	690	34.5	13200
UC-06-80-55	40	1.5	5.2	2.6	15	960	60	14960
UC-06-80-65	40	1.5	5.2	2.6	15	960	60	14960
UC-06-80-80	40	2	6.88	3.44	12	960	60	14960
UC-07-100-55	53	1.5	5.2	2.6	15	1350	79.5	16600
UC-07-100-65	53	1.5	5.2	2.6	15	1350	79.5	16600
UC-07-100-80	53	2	6.88	3.4	12	1350	79.5	16600
UC-07-120-55	63	1.5	5.2	2.6	15	1500	94.5	16600
UC-07-120-65	63	1.5	5.2	2.6	15	1500	94.5	16600
UC-07-120-80	63	2	6.88	3.44	12	1500	94.5	16600
Model	Max. Span (Ft)	HP*2	Full Load Amp.		Gear Ratio	Est Weight (lbs/pair)	WHEEL BASE (In.)	Max. Wheel Loading
			230 (A)	460(A)				
10 Ton								
UC-06-60-55	26	1.5	5.2	2.6	15	880	39	14960
UC-06-60-65	26	1.5	5.2	2.6	15	880	39	14960
UC-06-60-80	26	2	6.88	3.44	12	880	39	14960
UC-07-80-55	40	1.5	5.2	2.6	15	1200	60	16600
UC-07-80-65	40	1.5	5.2	2.6	15	1200	60	16600
UC-07-80-80	40	2	6.88	3.44	12	1200	60	16600
UC-08-100-55	53	1.5	5.2	2.6	15	2270	79.5	24000
UC-08-100-65	53	2	6.88	3.44	12	2270	79.5	24000
UC-08-100-80	53	2	6.88	3.44	12	2270	79.5	24000
UC-08-120-55	63	2	6.88	3.44	15	2585.5	94.5	24000
UC-08-120-65	63	2	6.88	3.44	12	2585.5	94.5	24000
UC-08-120-80	63	2	6.88	3.44	12	2585.5	94.5	24000



Black Bear Corporation
 7688 Carnegie Ave, Fontana CA 92336
 Ph: 909-390-0380 Fax: 909-390-0270
www.blackbearusa.com



Underhung Endtruck- **Single** Girder

September 2012

Wheel Size	Standard Flange	Flange extension	Price Adder
Ø 3"	4"-6"	6"-8"	See Price List
		8"-10"	
Ø 4"	4"-6"	6"-8"	
		8"-10"	
		10"-12"	
Ø 5"	5"-7"	7"-9"	
		9"-11"	
		11"-13"	
Ø 6"	5"-7"	7"-9"	
		9"-11"	
		11"-13"	
Ø 7"	6"-8"	8"-10"	
		10"-12"	
		12"-14"	
Ø 8"	7"-9"	9"-11"	
		11"-13"	
		13"-15"	